

## **SILVERLINK 600**



**Specifications** 

J12 - Lincat Silverlink 600 Electric Free-standing Twin Tank Fryer - 2 Baskets - W 600 mm - 2 x 6.0 kW Deliver perfectly crisp on the outside and fluffy on the inside chips time after time with the Silverlink 600 Free Standing Electric Fryer.

- Two independently operated fryer tanks for greater versatility, delivers 52kg of chips per hour
- Front mounted controls for safety
- Hinged elements to give easy access during cleaning
- Cool zone collects cooking debris gives cleaner cooking results and saves money by prolonging the life of the oil
- Thermostatically controlled to give accurate cooking temperatures throughout cooking. Flame failure device and top temperature cut out ensures safe operation.
- Fully moulded 304 stainless steel tank and heavy duty nickel plated baskets for the most demanding of operations
- Front drain off tap for easy removal of cooking oil

Summary		Power and Performance			
Brand	Lincat	Total Power kW	2×6.0		
Range	Silverlink 600	Temperature Range °C	130-190		
Power Type	Electric	IP Rating	IP34		
Unit Type	Free-standing	Temperature Control	Mechanical		
Available in UK Only	No				
UK Warranty	2 Years Parts and Labour Warranty				
Export Warranty	Contact your local dealer				
GTIN	5056105105107				
Key Specifications		Capacity			
Number of Backeto	0		701 - 1: 10 - 10 - 1 - 1 - 1 - 1		

Key Specifications		Capacity			
Number of Baskets	2	Product Output per Hour	36kg chips -12mm [frozen], 52kg chips -		
Number of Tanks	2	rioddet Odtput per riodi	12mm [chil		
Gravity Filtration	No	Capacity Litres	2 × 9.0		
Pumped Filtration	No				
Drain Location	Front-mounted				

Weights and Dimensions		Supply Connections	Supply Connections		
Unit Height (External) mm	980	Requires Installation	Yes		
Unit Width (External) mm	600	Requires Electrical Supply	Yes		
Unit Depth (External) mm	632	UK 3 Pin Plug	No		
Net Weight Kg	44	Requires Hardwiring	Yes		
		Electrical Supply Rating Watts	2 × 6,000		
		Single Phase Amps	2 × 26.0		
		Single Phase Voltage	230		
		Three Phase Amps	L1=2 × 13.0; L2=2 × 13.0; L3=N/A		
		Three Phase Voltage	400		

		Three Phase Voltage	400	
Shipping				
Packed Weight Kg	54			
Packed Height cm	110			
Packed Width cm	78			
Packed Depth cm	78			



## **SILVERLINK 600**


## **Available Accessories**


BA96 BASKET SPUN DFSMALL


ST10 NULL

TA28 NULL

## **Technical Picture**





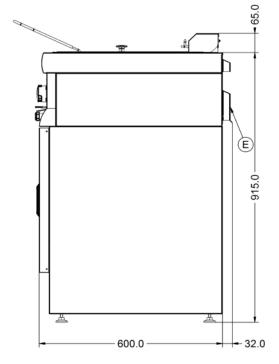







**Lincat Limited** 

Whisby Road,

Lincoln, LN6 3QZ,

United Kingdom

**Company No:** 2175448

A member company of

**Customer Care** 

**Tel:** +44 1522 875500

Email: care@lincat.co.uk

**Export Customers** 

**Tel:** +44 1522 503250

Email: export@lincat.co.uk

**Opening Hours** 

Monday - Friday:

8.30am - 5pm



Product Code: J12 Page Number: 3 Print Date: 04/12/2019