

# PFA SERIES MODELS

FULLY AUTOMATIC VENTLESS COUNTERTOP DEEP FRYER

Advanced by Design



- FULLY AUTOMATED COOKING SYSTEM
- FRONT LOADING/ FRONT DISPENSING
- SMALL FOOTPRINT
- PROGRAMMABLE PRESETS
- ODORLESS
- INTEGRAL VENTLESS HOOD
- INTEGRAL FIRE SUPPRESSION
- LARGEST OUTPUT
- EASY TO CLEAN
- FULLY ENCLOSED
- INTEGRAL INFRA-RED, CERAMIC HEAT LAMP AND OIL DRAINAGE KIT
- NON-STICK BASKET




PERFECT FRY COMPANY LLC  
42 Allen Martin Drive  
Essex Junction, VT 05452  
[www.PerfectFry.com](http://www.PerfectFry.com)

GENERAL INFORMATION:  
Phone: 1-802-658-6600  
Fax: 1-802-864-0183  
Email: [profits@perfectfry.com](mailto:profits@perfectfry.com)  
83717 Rev A (1/2020)




*The Benchmark in Ventless Deep Frying*

## CLEARANCES

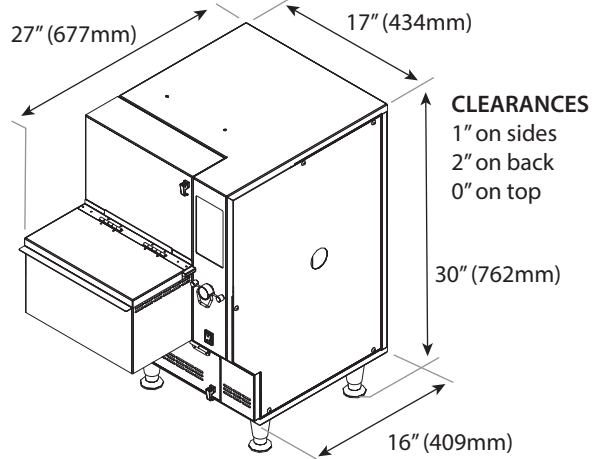

## AIRFLOW DIAGRAM

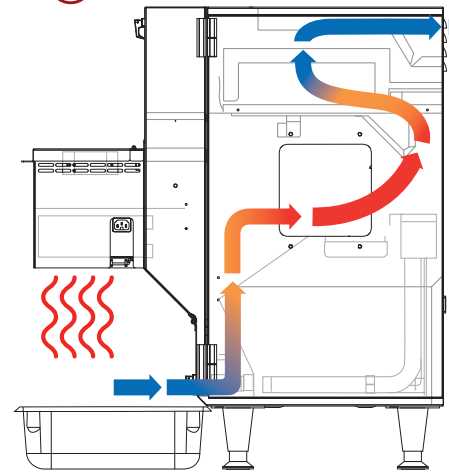

## SPECIFICATIONS TABLE

MODEL	PFA720	PFA570	PFA570	PFA375
ORDER NUMBER	Determined by options, please call 1-603-225-6684			
POWER SUPPLY (volts) <sup>1</sup>	240	240	208	240
CURRENT (amps)*	32	25.4	28.8	18
CORD OPTION	8/3 powercord 6-50 plug	8/3 powercord 6-50 plug	8/3 powercord 6-50 plug	10/3 powercord 6-30 plug
POWER (kilowatts)	7.6	6.1	6	4.2
CAPACITY (lbs/hr)‡**	90	70	70	50

<sup>1</sup>other voltages and/or wattages may be available, please contact 1-603-225-6684

## ADVANCED ELECTRONIC CAPABILITIES

- Cook Time Sensitivity (CTS)<sup>™</sup>
- Stand-by Mode
- Preset Counters
- Dual Load Cook Cycle
- Food Type Sensitivity (FTS)<sup>™</sup>
- Hold Time Monitor

## RAPIDFRY<sup>™</sup> TECHNOLOGY

RapidFry<sup>™</sup> technology allows the operator to pre-load food into the drawer while other food product is frying in the cooking oil. The second load of food will automatically begin cooking once the first cook cycle is completed.

## GENERAL SPECIFICATIONS

\*For use on an individual branch circuit. This fryer must be properly connected to a grounded, dedicated phase circuit according to local installation standards and codes.


\*\* Using 11/2 minute fast fries.

Heat Lamp (see below)	Integral On All Units
Phase	Single (3 wire)
Cycles	50/60 Hz
Weight	125 lbs (57 kg)
Shipping Weight	155 lbs (70kg)
Shipping Dimensions	Depth 24" (610 mm)
	Width 29" (737mm)
	Height 36" (914 mm)
Shipping Cube	9.52 ft <sup>3</sup> (.271 m <sup>3</sup> ) 2.75
Oil Capacity	US Gallons (11 L)
Product Capacity	3 lbs per load
	****Locking Cabinet Option also Available

## ACCESSORIES

Heat Lamp -  
(Part number determined by country,  
please call 1-603-225-6684)

2 amps  
240 volt  
500 watts  
Ordered Separately

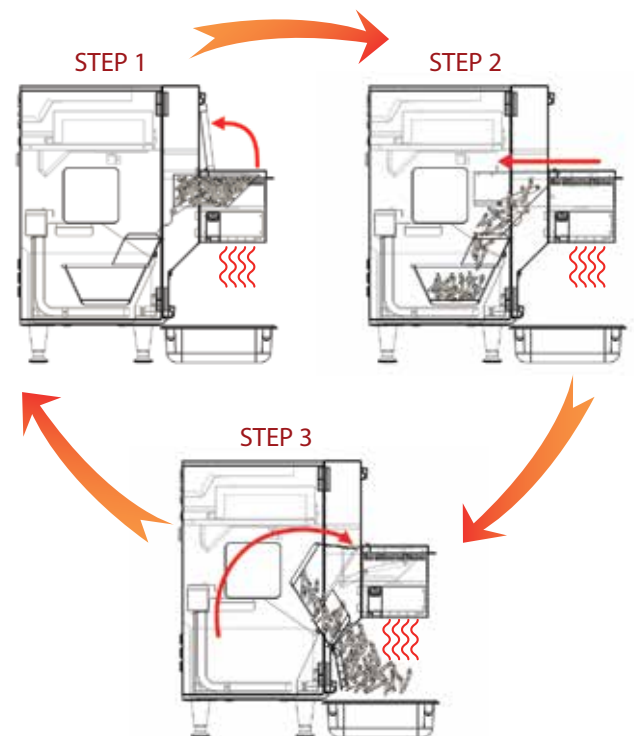

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
© 2020 Perfect Fry Company LLC. Printed in USA  
83717 Rev A (1/2020)

