

Induction Hob – SLI21

Key Features

- Type: Electric
- Twin zones: front / rear layout
- Rotary controls
- Power-on neon
- LED display of power level 1-9
- Power boost function
- Auto heat up function
- Residual heat warning display
- No-pan-present display
- Easy-change filter
- Easy clean Silverlink profile
- In-built cooling fans
- Overheat protection
- 13 amp plug and lead
- Compatible with ambient pedestals




SLI21

Construction


- Body: stainless steel grade 430
- Hob surface: 6mm thick Schott Ceran® ceramic glass

Available Options






Available Accessories

- Replacement air filter

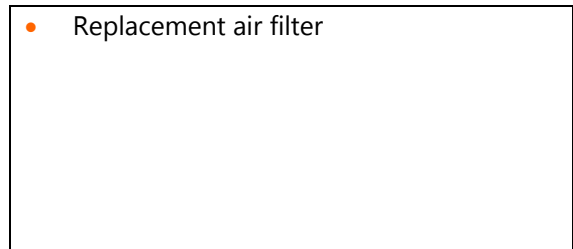

Specifications

Model	SLI21
External height (mm)	290
External width (mm)	450
External depth (mm)	600
Net weight unpacked (kg)	18.1
Gross weight packed (kg)	19
Shipping volume (m ³)	0.214
Hob	2 zones
Electrical supply 1N~+E	230V/1ph/50Hz
Total power rating	13 A
Heat input rear zone, normal (kW)	2.0
Heat input rear zone, boost * (kW)	3.0
Heat input front zone, normal (kW)	1.0
Heat input front zone, boost * (kW)	1.8
(*) Max total heat input cannot exceed 3kW	

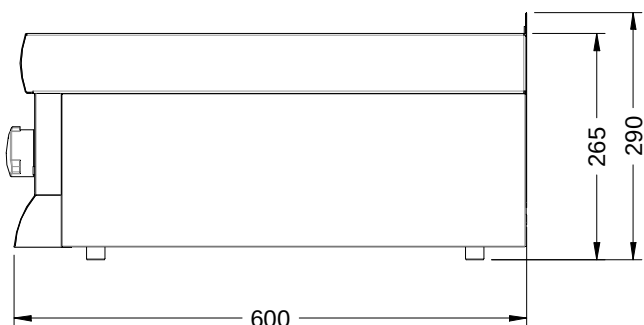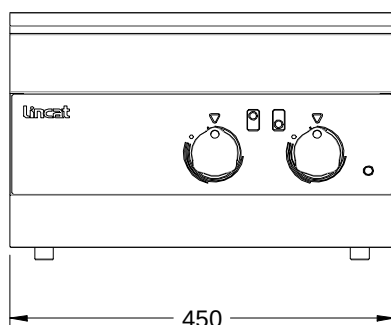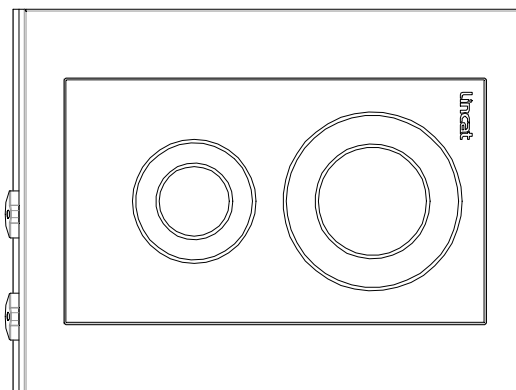

Lincat Limited, Whisby Road,
Lincoln LN6 3QZ,
United Kingdom

UK Sales Tel: 01522 875500 UK Spares Tel: 01522 875510 UK General Tel: 01522 875555
UK Fax: 01522 875530 International Sales Tel: +44 1522 503250 International Fax: +44 1522 875530
Website: www.lincat.co.uk UK Sales e-mail: sales@lincat.co.uk International Sales e-mail: export@lincat.co.uk



Document ref:
SLI21-A003
Issue date: December 2014